



SBX6502

INSTALLATION/OWNER'S MANUAL

**2-Way Full Range Speaker Box with
two 6.5" Woofers and two 3" Wide Dispersion Horn Tweeters**



Installation

Thank you for purchasing the SBX6502. Although Dual has attempted to make sure all of the information contained within this manual is accurate, please be aware that any part of it is subject to change without notice.



CAUTION


The following instructions should be used as a general guideline only. If you are unsure about performing any of the procedures listed below, please consult a professional car audio installation center.

Before installation, please follow these guidelines:

1. Be sure to carefully read and understand the instructions before attempting to install this product.
2. For safety, disconnect the negative terminal from the battery prior to beginning the installation.
3. Use the highest quality connectors for a reliable installation and to minimize signal or power loss.
4. Use caution before you drill or cut! Be careful not to cut or drill into gas tanks, fuel lines, brake or hydraulic lines, vacuum lines or electrical wiring when working on any vehicle.
5. Never run wires underneath your vehicle. Running wires inside the vehicle provides the best protection from exhaust heat and environmental elements.
6. Avoid running wires over, near or through sharp edged surfaces. Use rubber grommets to protect any wires routed through metal.
7. When running cable from the amplifier, avoid running it near sources of high current


Connection Diagram

Strip 5/8" off the end of the wires, and connect the SBX6502 to an amplifier as shown in the Connection Diagram below.

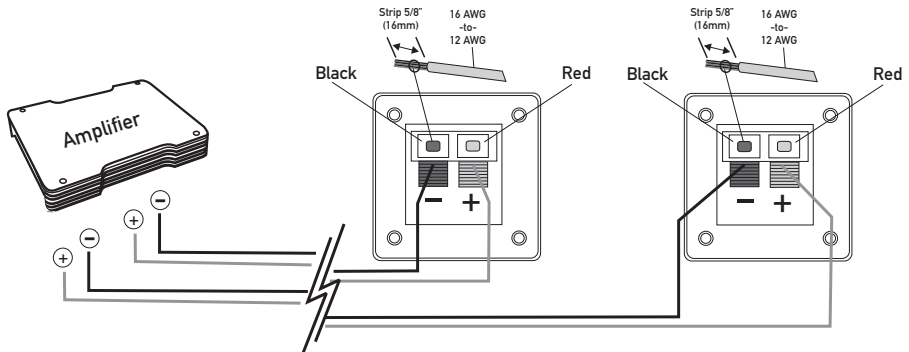

Dimensions & Specifications

This diagram is to be used with the dimensions listed below to provide measurements for mounting the unit. Design and specifications subject to change without notice.

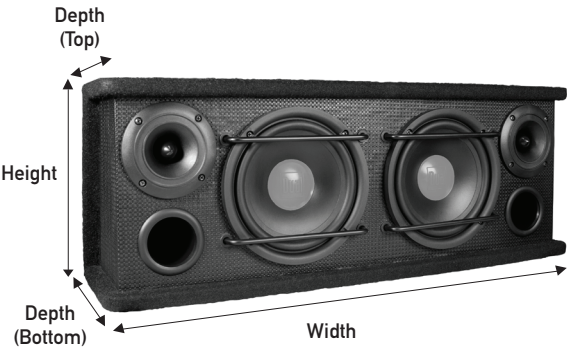

Dimensions	Specifications
Height: 8.78" (223mm)	Sensitivity: 90dB
Width: 24.01"(610mm)	Frequency response: 45Hz-25kHz
Depth (Top): 5.04" (128mm)	Nominal impedance: 4 Ohm
Depth (Bottom): 6.89" (175mm)	RMS power handling: 150 Watts
	Peak power range: 300 Watts

Installation Diagram

After determining the mounting position, turn the enclosure upside-down and attach the mounting brackets to the bottom of the enclosure using the enclosed screws. Each bracket must be positioned properly under the cabinet to allow a screw to easily pass through it for attachment to the vehicle. If the brackets and screws are not applicable to your installation, some other means must be used to secure the enclosure to your vehicle.



Limited One Year Warranty

This warranty gives you specific legal rights. You may also have other rights which vary from state to state.

Dual Electronics Corp. warrants this product to the original purchaser to be free from defects in material and workmanship for a period of one year from the date of the original purchase.

Dual Electronics Corp. agrees, at our option, during the warranty period, to repair any defect in material or workmanship or to furnish an equal new, renewed or comparable product (whichever is deemed necessary) in exchange without charges, subject to verification of the defect or malfunction and proof of the date of purchase. Subsequent replacement products are warranted for the balance of the original warranty period.

Who is covered? This warranty is extended to the original retail purchaser for products purchased and used in the U.S.A.

What is covered? This warranty covers all defects in material and workmanship in this product. The following are not covered: installation/removal costs, damage resulting from accident, misuse, abuse, neglect, product modification, improper installation, incorrect line voltage, unauthorized repair or failure to follow instructions supplied with the product, or damage occurring during return shipment of the product.

What to do?

1. Before you call for service, check the troubleshooting guide in your owner's manual. A slight adjustment of any custom controls may save you a service call.
2. If you require service during the warranty period, you must carefully pack the product (preferably in the original package) and ship it by prepaid transportation with a copy of the original receipt from the retailer to an authorized service center.
3. Please describe your problem in writing and include your name, a return UPS shipping address (P.O. Box not acceptable), and a daytime phone number with your shipment.
4. For more information and for the location of the nearest authorized service center please contact us by one of the following methods:

- Call us toll-free at 1-866-382-5476
- E-mail us at cs@dualav.com

Exclusion of Certain Damages: This warranty is exclusive and in lieu of any and all other warranties, expressed or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose and any obligation, liability, right, claim or remedy in contract or tort, whether or not arising from the company's negligence, actual or imputed. No person or representative is authorized to assume for the company any other liability in connection with the sale of this product. In no event shall the company be liable for indirect, incidental or consequential damages.



Dual Electronics Corporation
Toll Free: 1-866-382-5476
Monday-Friday, 9AM-5PM EST

www.dualav.com
©2014 Dual Electronics Corp. All rights reserved.
NSA0214-V1
Printed in China