

INSTALLATION/OWNER'S MANUAL

Marine Receiver with Built-In Digital Amp















Preparation


Please read entire manual before installation.

Before You Start

- Disconnect negative battery terminal. Consult a qualified technician for instructions.
- Avoid installing the unit where it would be subject to high temperatures, such as from direct sunlight, or where it would be subject to dust, dirt or excessive vibration.


Getting Started

- Remove trim ring from unit.
- Remove 2 transit screws located on top of the unit.
- Insert the supplied keys into the slots as shown, and slide the unit out of the mounting sleeve.
- Install mounting sleeve into opening, bending tabs to secure.
- Connect wiring harness and antenna. Consult a qualified technician if you are unsure.
- Certain vehicles may require an installation kit and/or wiring harness adapter (sold separately).
- Test for correct operation and slide into mounting sleeve to secure.
- Snap trim ring into place.

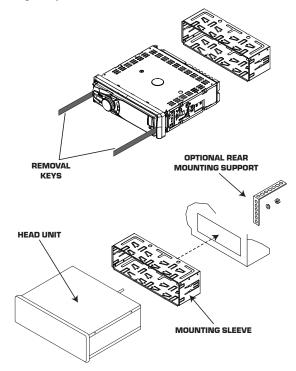

TYPICAL DIN FRONT-LOAD MOUNTING METHOD

Wiring Diagram

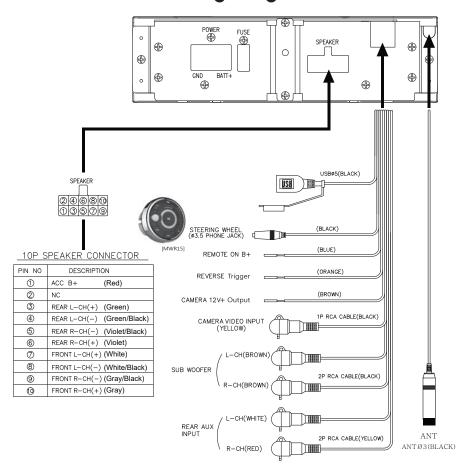


FUSE

When replacing the fuse, make sure new fuse is the correct type and amperage. Using an incorrect fuse could damage the radio.

The AM505BT uses one 30 amp ATM fuse located in-line.


Control Locations - Receiver

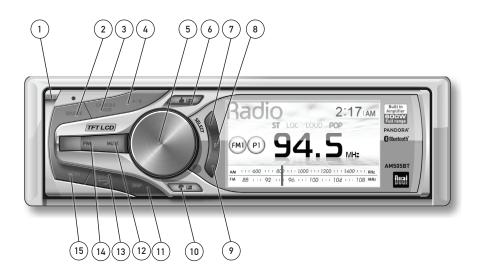

- 1 Open
- 2 Source
- 3 Camera / Loudness
- (4) Play / Pause
- 5 Volume Knob/ Select (push)
- 6 Preset Up / Thumbs Up
- 7 Tune / Track Up
- (8) Function

- 9 Tune / Track Down
- (10) Preset Down / Thumbs Down
- (11) Display
- 12) Mute
- (13) Band / Go Back
- (14) Power
- (15) Menu

Control Locations - Remote

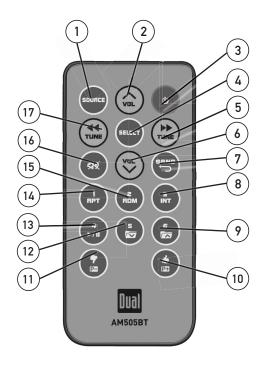

- 1 Source
- 2 Volume Up
- 3 Power
- (4) Select
- 5 Tune / Track Up
- 6 Volume Down
- 7 Band / Go Back
- 8 Key 3 / Intro
- (9) Key 6 / Folder Up

- (10) Preset Up / Thumbs Up
- (11) Preset Down / Thumbs Down
- (12) Key 5 / Folder Down
- (13) Key 4 / Play / Pause
- (14) Key 1 / Repeat
- (15) Key 2 / Random
- (16) Mute
- 17) Tune / Track Down

General Operation

Faceplate Removal | Press OPEN to open the face plate, then pull away from the right side to remove. To re-install, insert right side of

faceplate first then push left side to secure.

Power On/Off Press O or any other button to turn the unit on. Press O to

turn the unit off.

Source Press **SOURCE** to enter the Source Menu, then press

SOURCE or rotate the volume knob to select between Tuner, Auxiliary Input, USB, iPod, Bluetooth and Pandora modes.

Modes of operation are shown in the display.

Auxiliary Input The AM505BT uses the IP35USB adapter on the back of the unit for connecting an audio device, MP3 player, etc. Refer

to the wiring diagram for connection instructions. Once connected, press **SOURCE** to select auxiliary input mode.

Volume Adjust volume using volume knob (00-46).

Display | Press DISP to toggle between ID3 tag and file/folder name

for MP3/WMA files being played from USB devices.

Reset Press RESET upon initial installation or if abnormal operation occurs. Reset button is located behind the front

operation occurs. Reset button is tocated bening the front panel.

panet.

Set the Clock The unit will display the time on the LCD display. Clock

settings are adjusted in the General setup menu.

12/24-hour Clock The clock will display 12-hour AM/PM time or 24-hour time

(22:00). Frequency spacing is adjusted in the General setup

menu (refer to page 8).

Camera / Loudness Press to manually activate camera mode (camera wire will supply power while this mode is on). Press and hold for

three seconds to activate Loudness settings (Low, High, Off).

6

General Operation

Setup Menu

Press **MENU** to toggle through and select one of the following setup menus: Audio, General, Gain and Screen.

- 1. Once the desired menu is displayed, rotate the volume knob to scroll through the list of menu features.
- Press SELECT to select a specific feature to adjust, then rotate the volume knob left/right to adjust or activate the desired feature.
- 3. Press SELECT to confirm and save the changes.

Audio Setup Menu

Menu Function	Options
Equalization Curves	Rotate the volume knob to cycle through the following equalization curves: Flat, Pop, Jazz, Classic, Beat, Rock and User. Any manual adjustment to the Bass or Treble settings are automatically saved as User.
Loudness Curves	Rotate the volume knob to cycle through the following loudness curves: - Loud Off: Disables the loudness function. - Loud High: Enables the loudness function. Activating this feature will enhance the bass and treble frequencies when listening to music at low volumes. - Loud Low: Enables the loudness function. Activating this feature will enhance the bass and treble frequencies when listening to music at low volumes.
Bass Level	Rotate the volume knob to adjust the bass level setting (-6 minimum / +6 maximum).
Bass Frequency	Rotate the volume knob to select one of the following bass frequency settings: 60 Hz, 80 Hz, 100 Hz or 200 Hz.
Middle Level	Rotate the volume knob to adjust the middle level setting (-6 minimum / +6 maximum).
Middle Frequency	Rotate the volume knob to select one of the following middle frequency settings: 500 Hz, 1 kHz, 1.5 kHz or 2.5 kHz.
Treble Level	Rotate the volume knob to adjust the treble level setting (-6 minimum / +6 maximum).
Treble Frequency	Rotate the volume knob to select one of the following treble frequency settings: 10 KHz, 12.5 KHz, 15 KHz or 17.5 KHz.
Balance	Rotate the volume knob to adjust the balance setting. (12-L to 12-R; 0 represents equal balance).
Fader	Rotate the volume knob to adjust the fader setting. (12-F to 12-R; 0 represents equal balance)
Subwoofer	Rotate the volume knob to turn subwoofer output ON or OFF.
Subwoofer Level	Rotate the volume knob to adjust subwoofer level between 0 and 12.
Subwoofer Frequency	Rotate the volume knob to select one of the following subwoofer center frequency settings: Off, 80 Hz. 120 Hz and 160 Hz. "Off" represents a full range subwoofer output.

General Operation

General Setup Menu

Menu Function	Options	Action	
Set the Clock	Clock	Rotate the volume knob to adjust the hours, then press SELECT to confirm. Repeat to adjust the minutes, and repeat again to adjust AM/PM setting.	
Clock Mode	12 Hour	Programs the unit to display 12-hour AM/PM time (example: 10:00 PM)	
	24 Hour	Programs the unit to display 24-hour time (example: 22:00)	
	Off	Programs the unit to not scroll any information on the display.	
Scrolling	Once	Programs the unit to only scroll information once.	
Option	15Sec	Programs unit to scroll information once every 15 seconds (default).	
	On	Programs unit to scroll information continuously.	
iPod Control	Full	Programs the head unit to advanced control of the iPod/iPhone device.	
	Manual	Programs the head unit to manual control of the iPod/iPhone device and allows music to be controlled from the iPod/iPhone device.	
Beep Off Disables the confirmation beep.		Disables the confirmation beep.	
Confirmation	On	Enables the confirmation beep.	
Programmable Turn On Volume	Variable Value	Programs unit to always turn on at a specific volume (default is Off). A volume level of 1-30 can be selected.	
Backlight		Rotate the volume knob to adjust the brightness setting of the display screen from 1 to 7.	
Demo		Rotate the volume knob to enable (ON) or disable (OFF) the demonstration mode.	

General Operation

Gain Setup Menu

Menu Function	Options
Tuner Gain	Rotate the volume knob to adjust the tuner gain. (-6 minimum / +6 maximum)
Aux Gain	Rotate the volume knob to adjust the gain for the front auxiliary input. (-6 minimum / +6 maximum)
Bluetooth	Rotate the volume knob to adjust the gain for the rear auxiliary input. (-6 minimum / +6 maximum)
USB Gain	Rotate the volume knob to adjust the gain for USB playback. (-6 minimum / +6 maximum)
iPod Gain	Rotate the volume knob to adjust the gain for iPod playback. (-6 minimum / +6 maximum)
Pandora Gain	Rotate the volume knob to adjust the gain for Pandora playback. (-6 minimum / +6 maximum)

Radio Setup Menu

Menu Function	Options	Action	
Tunner Frequency Spacing	USA	Programs the unit to USA tuner spacing. (200kHz for FM and 10kHz for AM).	
	S-America	Programs the unit to South American tuner spacing. (100kHz for FM and 10kHz for AM).	
	Europe	Programs the unit to European tuner spacing. (50kHz for FM and 9kHz for AM).	
Auto Station Store	AUTO STORE	Press SELECT to seek and save 6 strong stations in the current band.	
Local/Distance	OFF	Activales distance tuning.	
Tuning	On	Activales local tuning for strong station reception only.	
RDS	0FF	Disables the RDS function	
KD3	0n	Enables the RDS function	
DDC Degional	OFF	Cancels	
RDS Regional	RDS Regional On On when the radio is in regional mode		
RDS TA Volume	12	Default TA Volume	
RDS TA VOIGITIE	00-29	Adjust TA Volume using volume knob (00-29)	
	OFF	Cancels	
RDA TA	On	On in TA mode and flashing during a traffic announcement in precess	
RDS AF	0FF	Cancels	
	ON	On when AF follow mode is enabled (see also Tuning), flashing if no RDS data received	

AM/FM Tuner Operation

Manual Tuning Press TUNE ◄◄ or TUNE ▶▶ momentarily to change

radio frequency up or down one step at a time. Press and

hold to advance quickly.

(then release) to automatically seek and tune to the next

strong station.

Band | Press BAND to select between FM1, FM2, FM3, AM1 and

AM2 bands.

Storing Station Presets | Select the desired band and station. Press the

(F)unction button, turn the volume knob until the desired preset number is highlighted, then press SELECT to store

the preset.

Recalling Station Presets | Press the P+ or P- buttons to cycle through the 1-6 presets

in the current band.

Weather Band Tuner Operation

Manual Tuning Press TUNE

✓ or TUNE

momentarily to seek the

next weather band station.

Band Press BAND to select weather band (WB).

Recalling Station Presets | Press the P+ or P- buttons to cycle through the 1-6 presets

in the current band.

MP3/WMA Operation

Playing MP3/WMA Files

To play MP3/WMA files, connect a USB device containing MP3/WMA files. "Loading" will flash in the display. Depending on the number of files and folders, this may take several seconds.

Displaying Information

Press **DISP** to cycle between track information and file/folder information.

*Song title, artist name and album name will only be displayed if included with the MP3/WMA file.

When referring to MP3/WMA playback, the following terms are synonymous:

- · File name and track name
- · Folder name and directory name

Repeat

Press (F)unction to enter the Function Menu, then rotate the volume knob until Repeat is highlighted. Press SELECT, then rotate the volume knob to select one of the following repeat options.

- All Plays all songs on device.
- Track Continuously repeats selected song.
- Folder Continuously repeats all songs in selected folder.

Random

Press (F)unction to enter the Function Menu, then rotate the volume knob until Random is highlighted. Press SELECT, then rotate the volume knob to select one of the following options for random playback.

- Off Cancels the Random function.
- All Plays all songs in random order.
- Folder Plays all songs in folder in random order.

Intro

Press (F)unction to enter the Function Menu, then rotate the volume knob until Intro is highlighted. Press SELECT, then rotate the volume knob to select one of the following options for intro playback.

- Off Cancels the Intro function.
- All Plays first 10 seconds of each song.
- Folder Plays first 10 seconds of each song in folder.

Note: Folder repeat, random and intro options only function on devices recorded with more than one folder.

MP3/WMA Operation

File/Folder Search

Begin Searching

Press **SELECT** to enter the file/folder search mode. A list of all the folders from the device will be displayed.

Note: Any files located in the root directory will be located in the folder named "ROOT".

Choose a Song


Turn the **volume knob** to cycle through all the folders on the device, and press **SELECT** to choose the desired folder. The list of files in the selected folder will be displayed. Turn the **volume knob** to cycle through the list of files.

Menu Navigation

Pressing GO BACK when viewing the contents of a folder will return to the list of folders on the device. Press GO BACK again to exit the search menu.

Playing a Song

Once the desired song is displayed, press **SELECT** to begin playback of the desired song.

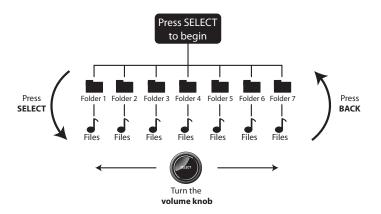

MP3/WMA Operation File/Folder Compatibility and Support

Туре	Specification	
Compatible File Types	MP3 data (.mp3) WMA data (.wma)	
Incompatible File Types	DRM protected files WMA lossless Apple lossless WMA Pro MP3 Pro MP3 playlists M4A/AAC data WAV lossless	
Sampling Frequency Rate Compatibility	MP3: 8kHz - 48kHz WMA: 32kHz - 48kHz	
Transfer Bit Rate Compatibility	MP3: 32kbps - 320kbpsWMA: 32kbps - 192kbps	
Character Support	 Song Title: 32 characters Artist Name: 32 characters Album Name: 32 characters File Name: 32 characters Folder Name: 32 characters 	
ID3 Tag Support	MP3 Tags: Version 1.0 - 2.4 WMA Tags	
Maximum number of files: 999 Maximum number of folders: 500 (plus the root folder) Maximum number of files in each folder: 999 Note: For devices with more than the maximum number of files/folders, some files will be ingnored and may not function properly.		
USB/SD File System • FAT/FAT32 file system supported. • HFS/NTFS/EXT2/EXT3 not supported.		

iPod Operation

Connect an iPod Device (Not Included)



The AM505BT features a direct USB control system for iPod. To play music from an iPod device, connect the USB cable (included with your iPod device) to the IP35USB adaptor on the back of the unit.

Once connected, "Loading" will flash in the display, then playback will begin automatically. If a song is playing on the iPod device before it is connected, it will continue to play.

Search Mode

Search Menu Functions (step 1)

Press SELECT once to enter the search mode.

(step 2)

Rotate the **volume knob** to choose between **playlist**, **songs**, **artists**, **albums** and **podcasts**. Press **SELECT** to select the desired search type.

(step 3)

Navigate to the desired song and press **SELECT** to begin playback of that song. Use the table below for reference when navigating through the menu options.

Note: Press GO BACK to access the previous level (up one level). Pressing GO BACK from the search main menu will exit the search.

See the below table for a list of the search menu navigation options.

Search Item	Menu Navigation	
Playlist	Menu → Playlists → Songs	
Songs	Menu → Songs	
Artists	Menu → Artists → Albums → Songs	
Albums	Menu → Albums → Songs	
Podcase	Menu → Podcasts	

Full/Manual Control

The AM505BT features both full and manual control modes for iPod/iPhone devices. See page 8 for details to toggle the control between full and manual modes.

Important: To support manual control for iPod/iPhone, the iPod device must be updated to the newest firmware.

Note: Not all iPod/iPhone devices are compatible with manual control mode.

iPod Operation

Song Select

Press ▶▶ to skip to the beginning of next song. Press

■ to return to the beginning of current song. Pressing

■ again skips to the beginning of previous song.

Fast Forward and Reverse

Press and hold $\triangleright \triangleright$ or $\blacktriangleleft \blacktriangleleft$ to fast forward or reverse a song.

Pause

Press ►/ II to temporarily stop playback.

Press ►/ II again to resume playback.

Repeat

Press (F)unction to enter the Repeat menu, then turn the volume knob to select one of the following options:

· Off - Repeats all tracks.

Current Song - Repeats selected track.

Random

Press (F)unction to enter the Random menu, then turn the volume knob to select one of the following options:

· Off - Cancels the RDM function.

All Songs - Plays all tracks in random order.

 Current Album - Plays all tracks in the selected album in random order.

Intro

Press (F)unction to enter the Intro menu, then turn the volume knob to select one of the following options:

• Off - Cancels the INT function.

. On - Plays first 10 seconds of each track.

Character Support

Only alphanumeric characters can be displayed (ASCII type). "NO SUPPORT" will be displayed if the file contains characters that can not be displayed. "NO FILE" will be displayed if there are no songs in the selected playlist.

Maximum character display information

*Song title – 32 character maximum

• *Artist name – 32 character maximum

• *Album name – 32 character maximum

*Song Title, Artist Name and Album name will only be displayed if included with the file.

Bluetooth Operation Pairing a Device

Preparation

Before you can use a Bluetooth device, it must be paired and connected. Make sure that Bluetooth is activated on your device before you begin the pairing process.

Pairing a New Device

The AM505BT broadcasts the pairing signal constantly when no devices are currently connected. Complete the pairing sequence from your Bluetooth device. Refer to the owner's manual for your device for more details.

The device name is "Dual BT"
The Bluetooth passcode "0000"

Note: The AM505BT can be in any mode of operation when pairing is performed.

Pairing Additional Devices

If a device is currently connected, press and hold \frown to disconnect the current device before a new device can be paired. Then begin the pairing sequence from the new Bluetooth device.

Connecting a Paired Device

Most Bluetooth devices support the auto-connect feature, and will connect automatically if the device is in range when the AM505BT is powered-on. If your device was previously paired but does not connect, use these instructions below.

- If your most recently connected Bluetooth device becomes disconnected or does not reconnect, press BAND from Bluetooth mode to reconnect your mobile device.
- To connect a previously paired device that was not recently connected:
- 1) If applicable, press and hold BAND to disconnect any connected mobile devices.
- 2) From Bluetooth mode, press SELECT. "Paired Devices" will appear on the LCD.
- 3) Turn the volume knob to cycle through the list of devices.
- 4) Press SELECT or BAND to connect to the desired device. It must be in range to connect.

Note: If the Auto Connect setup menu setting is set to OFF, you must press BAND to connect you device after pairing, and each time the AM505BT is powered-on.

Disconnecting a Device

Press and hold **BAND** for 3 seconds to disconnect a connected device. The device will remain paired and appear in the SEARCH menu but will not be connected.

Bluetooth Operation

Disconnecting a Device

Manual Dialing

Press once. "Enter Phone Number" appear on the display. Using the remote control, enter the phone number using the 0-9 buttons. Press or SELECT on the remote control or front panel to begin dialing.

Note: Placing a phone call from your cell phone will also initiate Bluetooth function.

Recent Calls List

Press SELECT from Bluetooth mode to view recent calls dialed, received or missed while connected to the head unit. Turn the volume knob to cycle through the recent phone numbers. Press SELECT or \(\bullet\) to dial the number.

Redialing the last number

To redial the last phone number, press \uparrow two times from Bluetooth mode. Press \uparrow or **SELECT** again to redial the phone number.

Receiving a Phone Call

Incoming phone calls will automatically appear on the display and a ring tone will be heard.

Note: The volume of the ring tone depends on the volume level of the head unit and may not be heard if the volume is set to a low level or mute is activated.

- Press \(\bullet \) to receive the incoming phone call.
- Press and hold to refuse the incoming phone call.

Note: If Auto Answer is set to ON in the setup menu, all phone calls will be received automatically.

Ending a Phone Call

During an active phone call, press \(\bullet \) to end a phone call. If the phone call was received when listening to music in another mode, the head unit will resume the previous mode.

Streaming Audio

The head unit supports A2DP wireless streaming audio from a Bluetooth mobile device directly to your head unit. The following functions can be used to control the music:

- Press ➤➤ to skip to the next available audio track.
- Press >/ II to toggle between play and pause during playback.

Bluetooth OperationStreaming Audio Operation

The AM505BT supports A2DP (advanced audio distribution profile) wireless streaming audio from your Bluetooth mobile device directly to your head unit. You can also control your music from the front panel of the head unit using AVRCP (audio video remote control profile).

- To stream music to your head unit, your mobile device must support the A2DP and AVRCP Bluetooth profiles. Check the owner's manual of your mobile device for details.
- Streaming audio must be enabled from your mobile device. This option will vary depending on the device. Some devices allow streaming audio to be disabled.

After pairing, connecting and enabling streaming audio from a compatible mobile device, begin playing music using the music player on your mobile device. Once the music is playing, the following functions can be used to control the music:

- The ►► button will skip to the next available audio track.
- The ►/ II button will toggle between play and pause during playback.

Note: Some Bluetooth devices may not fully support these commands.

Bluetooth Reset

Resetting the Bluetooth module will remove the list of paired phones.

To reset Bluetooth, perform the following steps:

- 1) Press SOURCE until the head unit is in Bluetooth mode.
- 2) Press and hold MENU for 3 seconds to reset Bluetooth settings back to factory default.

Compatibility Note:

Due to the differences in Bluetooth technology, some mobile devices may be incompatible, function improperly or may not support all features when used with the AM505BT.

Bluetooth Setup Menu Options

Function	Options	Action
Bluetooth	BL'TOOTH (ON/OFF)	Enables/disables Bluetooth functionality.
Auto Connect	AUTO CON (ON/OFF)	Set to On to allow a Bluetooth device to connect automatically or Off to require manual connection.

Pandora Operation

Requirements

Control for Pandora requires:

- An iPhone device with a reliable data connection, or an iPod touch that is connected to wireless internet.
- The Pandora App installed on the iPhone/iPod device.
- An active account with Pandora. Sign up at www.pandora. com.
- The USB sync cable that came with your iPod/iPhone device.

USB Connection

Connect an iPod touch or iPhone device (required, sold separately) to the IP35USB adaptor, using the USB sync cable included with your iPhone device.

Changing Stations

- 1. Press SELECT to display the Stations Menu.
- Rotate the volume knob to choose to sort channels by date or alphabetically.
- 3. Press **SELECT** to confirm, then turn the **volume knob** to cycle through the list of stations.
- Press SELECT when the desired station is highlighted, and playback will begin.

Note: Stations must be created on your account prior to connecting your iPod/iPhone device to the head unit.

Shuffle

Press **SELECT** to display the Stations Menu. Choose "Shuffle" from the stations menu to shuffle songs from all of your stations.

Skipping Tracks

Press >> to skip the current song.

Play/Pause

Press ►/ II to temporarily stop playback.
Press ►/ II again to resume playback.

Thumbs Up

Press • to tell Pandora you like the current track. Pandora will play more tracks with similar qualities.

Thumbs Down

Press • to tell Pandora you do not like the current track. Pandora will not play the current track again, and will avoid playing tracks with similar qualities.

Device Compatibility

Refer to <u>www.pandora.com/everywhere/mobile</u> for devices compatible with the Pandora mobile application.

Troubleshooting

Note: Pandora is an internet service, carrier and data charges may apply.

Limited One-Year Warranty

This warranty gives you specific legal rights. You may also have other rights which vary from state to state.

Dual Electronics Corp. warrants this product to the original purchaser to be free from defects in material and workmanship for a period of one year from the date of the original purchase.

Dual Electronics Corp. agrees, at our option, during the warranty period, to repair any defect in material or workmanship or to furnish an equal new, renewed or comparable product (whichever is deemed necessary) in exchange without charges, subject to verification of the defect or malfunction and proof of the date of purchase. Subsequent replacement products are warranted for the balance of the original warranty period.

Who is covered? This warranty is extended to the original retail purchaser for products purchased from an authorized Dual dealer and used in the U.S.A.

What is covered? This warranty covers all defects in material and workmanship in this product. The following are not covered: software, installation/removal costs, damage resulting from accident, misuse, abuse, neglect, product modification, improper installation, incorrect line voltage, unauthorized repair or failure to follow instructions supplied with the product, or damage occurring during return shipment of the product. Specific license conditions and copyright notices for the software can be found via www.dualav.com.

What to do?

- Before you call for service, check the troubleshooting guide in your owner's manual. A slight adjustment of any custom controls may save you a service call.
- If you require service during the warranty period, you must carefully pack the product (preferably in the original package) and ship it by prepaid transportation with a copy of the original receipt from the retailer to an authorized service center.
- Please describe your problem in writing and include your name, a return UPS shipping address (P.O. Box not acceptable), and a daytime phone number with your shipment.
- 4. For more information and for the location of the nearest authorized service center please contact us by one of the following methods:
 - Call us toll-free at 1-866-382-5476
 - E-mail us at cs@dualav.com

Exclusion of Certain Damages: This warranty is exclusive and in lieu of any and all other warranties, expressed or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose and any obligation, liability, right, claim or remedy in contract or tort, whether or not arising from the company's negligence, actual or imputed. No person or representative is authorized to assume for the company any other liability in connection with the sale of this product. In no event shall the company be liable for indirect, incidental or consequential damages.

Troubleshooting

Problem	Cause	Action
Unit will not turn on (no power)	Yellow wire not connected or incorrect voltage Red wire not connected or incorrect voltage	Check connections for proper voltage (11-16VDC)
(iio poirei)	Black wire not connected	Check connection to ground
	Fuse blown	Replace fuse
	Speaker wires not connected	Check connections at speakers
Unit has power (but no sound)	One or more speaker wires touching each other or touching chassis ground	Insulate all bare speaker wires from each other and chassis ground
	Yellow or red wire touching chassis ground	Check for pinched wire
Unit blows fuses	Speaker wires touching chassis ground	Check for pinched wire
	Incorrect fuse rating	Use fuse with correct rating
	WMA file is protected by DRM (Digital Rights Management)	Use WMA files that are not protected
NO FILE appears on display	No playable MP3/WMA files found on the device	Check the device for valid MP3/WMA files
	Communication error	Remove and reconnect the device
NO SUPPORT appears on display	An invalid ID3 tag version is present	Version 1.0 to 2.4 ID3 tags are supported.

Specifications

FM Tuner | Tuning range: 87.5MHz-107.9MHz

Usable sensitivity: **8.5dBf**50dB quieting sensitivity: **10dBf**Stereo separation @ 1kHz: >**30dB**Frequency response: **30Hz-13kHz**

AM Tuner | Tuning range: 530kHz-1710kHz

Usable sensitivity: 22uV

Frequency response: 30Hz-2.2kHz

General Speaker output impedance: 4-8 ohms
Subwoofer output voltage: 4 Volts RMS

Dimensions: 7" x 7" x 2" (178 x 178 x 50 mm)

Design and specifications subject to change without notice.



CEA-2006 Power Standard Specifications (reference: 14.4VDC +/- 0.2V, 20Hz-20kHz)

Power Output: 55 Watts RMS x 4 channels at 4 ohms and \leq 1% THD+N Signal to Noise Ratio: 70dBA (reference: 1 watt into 4 ohms)

FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Dual Electronics Corp. Toll Free: 1-866-382-5476 Monday-Friday, 9AM-5PM, EST

www.dualav.com ©2016 Dual Electronics Corp. All rights reserved.

iPhone, iPod, iPod classic, iPod nano, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.

"Made for iPod" and "Made for iPhone" mean that an electronic accessory has been designed to connect specifically to iPod or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod or iPhone may affect wireless performance.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Namsung is under license.

Pandora, the Pandora logo, and the Pandora trade dress are trademarks of Pandora Media, Inc., used with permission.

Other trademarks and trade names are those of their respective owners.