

XD28BT

INSTALLATION/OWNER'S MANUAL

AM/FM Receiver with Bluetooth

MP3











Preparation


Please read entire manual before installation.

Before You Start

- Disconnect negative battery terminal. Consult a qualified technician for instructions.
- Avoid installing the unit where it would be subject to high temperatures, such as from direct sunlight, or where it would be subject to dust, dirt or excessive vibration.

Getting Started

- Remove trim ring from unit.
- Install mounting sleeve into opening, bending tabs to secure.
- Connect wiring harness and antenna. Consult a qualified technician if you are unsure.
- Certain vehicles may require an installation kit and/or wiring harness adapter (sold separately).
- Test for correct operation and slide into mounting sleeve to secure.
- Snap trim ring into place.

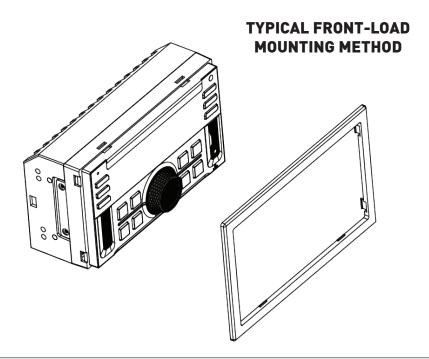


XD28BT INSTALLATION



Wiring Diagram

FUSE

When replacing the fuse, make sure new fuse is the correct type and amperage. Using an incorrect fuse could damage the radio. The unit uses one 10 amp ATC fuse located beside the wiring connector.

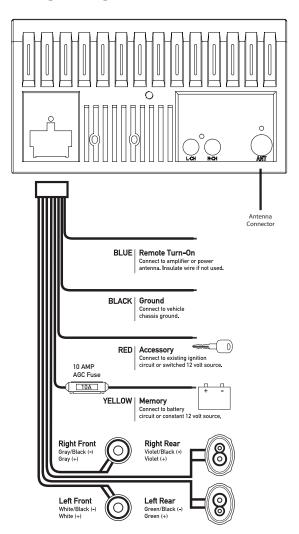



Control Locations



- 1) Preset 1 / Play/Pause
- 2 Preset 2 / Intro
- 3 Preset 3 / Repeat
- (4) Voice Assist
- (5) Bluetooth Talk
- (6) Tune / Track Down
- 7 Mode
- 8 Tune / Track Up
- 9 Volume Knob
- (10) Power / Mute

- (11) Dimmer
- (12) Band
- (13) Reset
- (14) Auxiliary Input
- (15) USB Port
- (16) Display
- (17) Preset 6 / Folder Up
- (18) Preset 5 / Folder Down
- (19) Preset 4 / Random

General Operation

Power On/Off

Press the \bullet button to turn the unit on. Press \bullet again to turn the unit off.

Changing Modes

Press **SOURCE** to select between Radio, USB, Auxiliary Input and Bluetooth. Sources of operation are shown in the display.

Volume

Adjust volume using the **volume knob**.

Mute

Display

Press **DISP** to toggle between various displayed information.

Dimmer

Press **DIM** to select the dimmer level, DIM HI/DIM MED/DIM LOW.

Auxiliary Inputs

Insert a 3.5mm cable in the unit's front AUX port.

Setting the Clock

With the unit on, press **DISP** to display clock time. Press and hold **DISP** until the hours begins to flash, then release.

Rotate the **volume knob** left or right to adjust the hours, then press **DISP**. When the minutes begins to flash, rotate the **volume knob** left or right to adjust the minutes.

Press **DISP** momentarily to save the selected time.

Reset

Press the **RESET** button to reset the unit back to the factory settings if abnormal operation occurs. The reset button is located on the front panel.

Audio / Menu

Press the **volume knob** momentarily to select between audio functions.

Press and hold the **volume knob** for more than two seconds to select between the menu functions.

Rotate the **volume knob** left/right to adjust or activate the desired function/audio.



AM/FM Tuner Operation

Seek Tuning

Press and hold **TUNE** ◀◀ or **TUNE** ▶► for two seconds to auto seek to the previous or next strong station.

Manual Tuning

Press **TUNE** ◀◀ or **TUNE** ▶▶ momentarily to change radio frequency up or down one step at a time. Press and hold **TUNE** ◀◀ or **TUNE** ▶▶ for three seconds to advance quickly, then release it to stop on desired station.

Band

Press **BAND** to select between FM1, FM2, FM3, AM1 and AM2 bands. Up to six presets can be programmed for each band, enabling up to 18 FM stations and 12 AM stations to be stored in memory.

Storing Presets

To store a station, select the desired band and station. Press and hold the desired preset button (1-6) for more than two seconds. When stored, the preset number will appear in the display.

Recalling Presets

Preset stations can be recalled anytime by pressing the corresponding preset button.

Automatically Store

Press and hold the **volume knob** for more than two seconds, then press **DISP** to 18 FM stations and 12 AM stations automatically.

Preset Scan Stations

Touch **PS** to recall each preset station that has been stored in memory for each band.

(Available with the Dual Smart Remote App only.)

XD28BT OPERATION

USB Operation

Playing MP3 Files

To play MP3 files, insert a USB device containing MP3 files.

Track Select

Press **TUNE** ►► to skip to the beginning of the next track. Press **TUNE** ◀ to skip to the beginning of the previous track.

Fast Forward and Reverse

Press and hold **TUNE** ►► or **TUNE** ◀ to fast forward or reverse a track.

Pause

Press ►/II to temporarily stop USB playback.

Press ►/II again to resume playback.

Folder Access

Folders can be found by pressing Folder Up or Folder Down. About one second after the folder name is displayed, the first file under the selected folder will be displayed and playback will begin.

Repeat

Press **RPT** to toggle between RPT ALL, RPT FLR and RPT ONE.

• RPT ALL - Plays all tracks on USB device.

• RPT ONE - Continuously repeats selected track.

Random

Press **RDM** to play tracks in random order; press again to cancel the RDM function.

Intro

Press **INT** to play the first 10 seconds of each track; press again to cancel the INT function.



Bluetooth Operation

Preparation

Before using a Bluetooth device, it must be paired and connected. Ensure that Bluetooth is activated on your device before beginning the pairing process.

Pairing a New Device

The head unit broadcasts the pairing signal constantly when no devices are connected. Complete the pairing sequence from your Bluetooth device. Refer to the owner's manual for your device for more details.

The device name is "Dual Media Player". The Bluetooth passcode is "1234".

Note: If passcode "1234" does not pair your device to the receiver, use passcode "0000".

Note: The head unit can be in any mode of operation when pairing is performed.

Streaming Audio Troubleshooting

The head unit supports A2DP wireless streaming audio from a Bluetooth mobile device directly to your head unit.

The following functions can be used to control the music:

- Press ➤➤ to skip to the next available audio track.
- Press ►/II to toggle between play and pause during playback.

Dual iPlug P2 Smart App Remote Control

Use the Dual iPlug P2 Smart App Remote Control on an Apple or Android smartphone to control the receiver via Bluetooth.

Change the mode, station, song, volume, and settings directly from your smartphone without being in the receiver's line-of-sight.

Download the Dual iPlug P2 Smart App Remote Control from Apple App Store or Google Play Store and install it on your smartphone or tablet (QR code download link on the right).





Voice Activation

Your receiver is designed with an easy access voice activation button to use Siri® or the

Google Assistant™ via your car's Bluetooth. Interact with your smartphone assistant whileyou drive with only the push of a button!

Bluetooth should be paired between your smartphone and the receiver. Press the voice

activation button, and the receiver will switch into Bluetooth mode, This will activate

Limited One Year Warranty

This warranty gives you specific legal rights. You may also have other rights which vary from state to state.

Dual Electronics Corp. warrants this product to the original purchaser to be free from defects in material and workmanship for a period of one year from the date of the original purchase.

Dual Electronics Corp. agrees, at our option, during the warranty period, to repair any defect in material or workmanship or to furnish an equal new, renewed or comparable product (whichever is deemed necessary) in exchange without charges, subject to verification of the defect or malfunction and proof of the date of purchase. Subsequent replacement products are warranted for the balance of the original warranty period.

Who is covered? This warranty is extended to the original retail purchaser for products purchased from an authorized Dual dealer and used in the U.S.A.

What is covered? This warranty covers all defects in material and workmanship in this product. The following are not covered: software, installation/removal costs, damage resulting from accident, misuse, abuse, neglect, product modification, improper installation, incorrect line voltage, unauthorized repair or failure to follow instructions supplied with the product, or damage occurring during return shipment of the product. Specific license conditions and copyright notices for the software can be found via www.dualav.com.

What to do?

- Before you call for service, check the troubleshooting guide in your owner's manual. A slight adjustment of any custom controls may save you a service call.
- If you require service during the warranty period, you must carefully pack the product (preferably in the original package) and ship it by prepaid transportation with a copy of the original receipt from the retailer to an authorized service center.
- 3. Please describe your problem in writing and include your name, a return UPS shipping address (P.O. Box not acceptable), and a daytime phone number with your shipment.
- 4. For more information and for the location of the nearest authorized service center please contact us by one of the following methods:
 - Call us toll-free at 1-866-382-5476
 - E-mail us at cs@dualav.com

Exclusion of Certain Damages: This warranty is exclusive and in lieu of any and all other warranties, expressed or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose and any obligation, liability, right, claim or remedy in contract or tort, whether or not arising from the company's negligence, actual or imputed. No person or representative is authorized to assume for the company any other liability in connection with the sale of this product. In no event shall the company be liable for indirect, incidental or consequential damages.



Troubleshooting

Problem	Cause	Action
Unit will not turn on (no power)	Yellow wire not connected or incorrect voltage Red wire not connected or incorrect voltage	Check connections for proper voltage (11~16VDC)
	Black wire not connected	Check connection to ground
	Fuse blown	Replace fuse
Unit has power (but no sound)	Speaker wires not connected	Check connections at speakers
	One or more speaker wires touching each other or touching chassis ground	Insulate all bare speaker wires from each other and chassis ground
Unit blows fuses	Yellow or red wire touching chassis ground	Check for pinched wire
	Speaker wires touching chassis ground	Check for pinched wire
	Incorrect fuse rating	Use fuse with correct rating
NO FILE appears on display	No playable MP3 files found on the device	Check the device for valid MP3 files
NO SUPPORT appears on display	An invalid ID3 tag version is present	Version 1.0 to 2.0 ID3 tags are supported.



Specifications

FM Tuner | Tuning range: 87.5MHz-107.9MHz

Usable sensitivity: 8.5dBf

50dB quieting sensitivity: **10dBf** Stereo separation @ 1kHz: **>30dB** Frequency response: **30Hz-13kHz**

AM Tuner Tuning range: 530kHz-1710kHz

Usable sensitivity: <42dBu

Frequency response: 30Hz-2.2kHz

General Speaker output impedance: 4 ohms
Line output voltage: 1.2 Volts RMS

Dimensions: 7" x 3.9" x 2.5" (178 x 99 x 63.5 mm)

Design and specifications subject to change without notice.



CEA-2006 Power Standard Specifications (reference: 14.4VDC +/- 0.2V, 20Hz~20kHz)

Power Output: 14 Watts RMS x 4 channels at 4 ohms and \leq 1%

THD+N

Signal to Noise Ratio: 75dBA (reference: 1 watt into 4 ohms)

XD28BT OPERATION

FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Dual Electronics Corp. Toll Free: 1-866-382-5476

www.dualav.com ©2023 Dual Electronics Corp. All rights reserved.

Other trademarks and trade names are those of their respective owners.

NSA011823-V01